TX665S

6.5“ 4Ω 90W RMS 2-way Separate spk, aluminum frame, TSV voice coil, silk dome neodymium tweeter

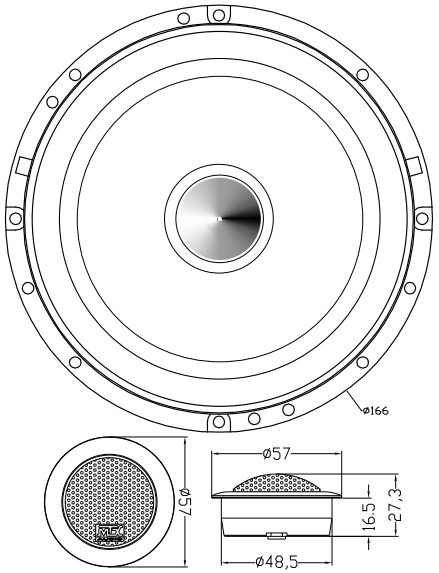

Dimensions

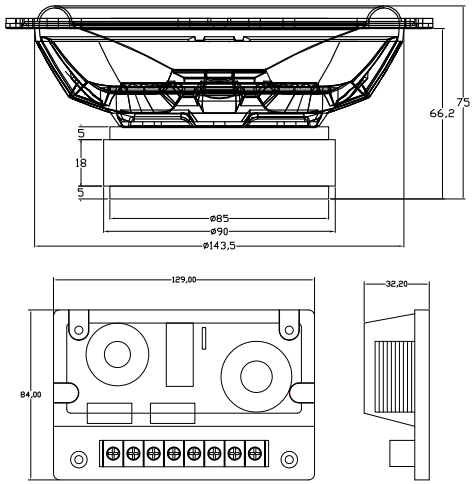

- Exceptional construction quality
- Exceptional sound quality
- Treated paper cone coated with glass particles for more musicality
- The best 30mm TSV TIL voice coil for the best sound quality
- Extra large strontium magnet (90x40mm) for better control and more power handling
- Injected aluminum frame for more rigidity and less vibration
- Top level Ø28mm neodymium tweeter with silk dome for more details
- Passive x-over with the best passive components (air coils, polypropylene caps)
- Aluminum phase plug to reduce stationnary waves
- Soft and musical sound quality with deep bass and detailed midrange

Complementary products

TX480D RFL4120 RFL5300

Specifications

- 2-way separate speakers
- Diameter : 16,5cm (6.5“)
- Peak Power : 360W
- RMS Power : 90W
- Sensitivity : 93,5dB/2,83v/1m
- Impedance : 4Ω
- Response : 40Hz - 28000Hz
- Mounting Depth : 66mm
- 28mm silk dome tweeter
- Grilles included

mtxaudio.eu

facebook.com/MTXEurope

twitter.com/MTXEurope