

MTX[®]

AUDIO



mtxaudio.eu




twitter.com/MTXEurope



facebook.com/MTXEurope

RFL

Ultimate High-end Power Amplifiers

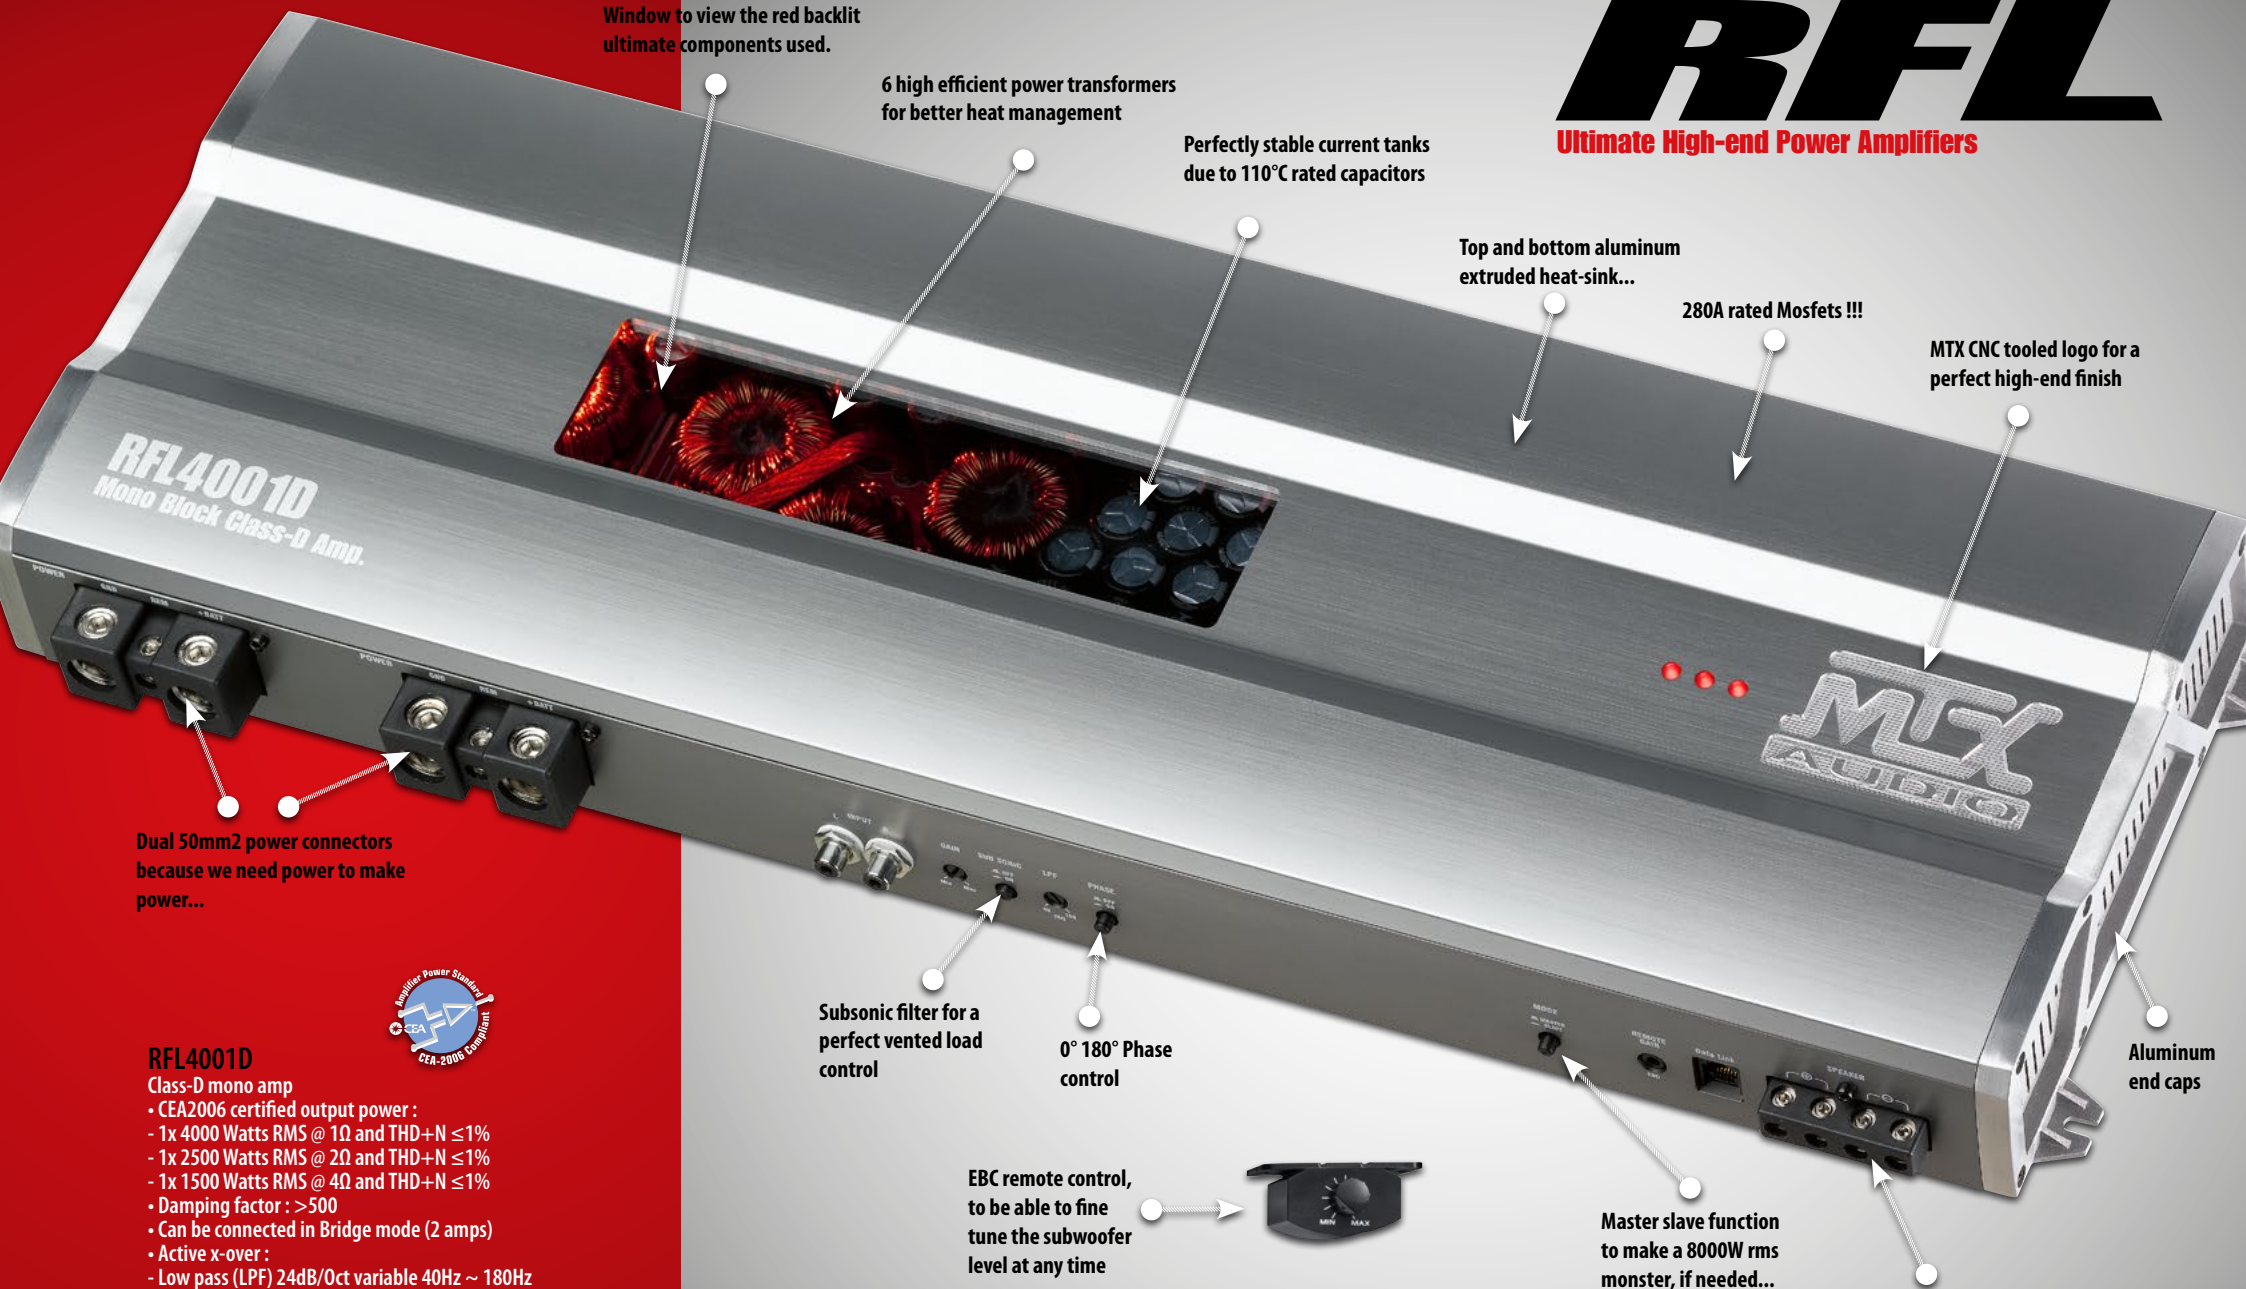

Window to view the red backlit ultimate components used.

6 high efficient power transformers for better heat management

Perfectly stable current tanks due to 110°C rated capacitors

Top and bottom aluminum extruded heat-sink...

280A rated Mosfets !!!

MTX CNC tooled logo for a perfect high-end finish

RFL4001D
Mono Block Class-D Amp.

Dual 50mm² power connectors because we need power to make power...



RFL4001D

Class-D mono amp

- CEA2006 certified output power :
- 1x 4000 Watts RMS @ 1Ω and THD+N ≤1%
- 1x 2500 Watts RMS @ 2Ω and THD+N ≤1%
- 1x 1500 Watts RMS @ 4Ω and THD+N ≤1%
- Damping factor : >500
- Can be connected in Bridge mode (2 amps)
- Active x-over :
- Low pass (LPF) 24dB/Oct variable 40Hz ~ 180Hz
- Subsonic filter 24dB/Oct at 20Hz
- Phase switch 0° or 180°
- Signal/noise ratio (1 watt) : >75dB
- THD+Noise (Distortion) (1 watt) : ≤0,1%
- Frequency response (±1dB) : 10Hz-150Hz
- Input sensitivity RCA : 100mV to 6V
- EBC remote (External Bass Control) included
- Dimensions : 626mm x 204mm x 59mm

Subsonic filter for a perfect vented load control

0° 180° Phase control

EBC remote control, to be able to fine tune the subwoofer level at any time



Master slave function to make a 8000W rms monster, if needed...

Aluminum end caps

4000W to ROCK any subwoofer...
Damping factor >500
= Tight control over any subwoofer

**Accurate
Bridge
Balance
Technology**

**US Patent
#06556683
Smart Engage
Auto Turn-on
Technology**

**US Patent
#05631608
PURE
N-Channel
Technology**

**US Patent
#06753729
Adaptive
Class-D
Technology**

**US Patent
#05783970
PURE
N-Channel
Technology**

**US Patent
#05598325
Efficient
Auto-Former
Technology**

RFL

Ultimate High-end Power Amplifiers

RFL5300

Hifi Class-AB 5 channel amp

CEA RMS Power :



- Puissance certifiée CEA2006 :
- Channels 1,2,3,4 : 4x120W RMS @ 2Ω THD+N ≤1%
- Channels 1,2,3,4 : 4x80W RMS @ 4Ω THD+N ≤1%
- Channels 1,2,3,4 : 2x240W RMS @ 4Ω THD+N ≤1%
- Mono channel 5 : 1x370W RMS @ 2Ω THD+N ≤1%
- Mono channel 5 : 1x250W RMS @ 4Ω THD+N ≤1%
- Active x-over channel 1 & 2 :
- High pass (HPF) 12dB/oct variable from 40Hz to 5KHz
- Active x-over channel 3 & 4 :
- High pass (HPF) 12dB/oct variable 40Hz ~ 800Hz
- Passé bas (LPF) 12dB/oct variable 40Hz ~ 5000Hz
- Band pass x-over (PBF) is the sum of LPF and HPF
- Active x-over channel 5 :
- Low pass (LPF) 24dB/oct variable 40Hz ~ 800Hz
- Signal/Noise ratio (1 Watt) : > 98dB
- THD+Noise (Distortion) (1 Watt) : ≤ 0,05%
- Frequency response (±1dB) : 10Hz-90000Hz
- Sensitivity : 200mV 6V
- EBC remote control included
- Dimensions : 626mm x 204mm x 59mm



RFL4120

Hifi Class-AB 4 channel amp

CEA RMS Power :



- Class-AB 4 channel amplifier
- CEA2006 certified output power :
- 4 x 200 Watts RMS @ 2Ω and THD+N ≤1%
- 4 x 120 Watts RMS @ 4Ω and THD+N ≤1%
- 2 x 400 Watts RMS bridged @4Ω and THD+N ≤1%
- Active x-over :
- High pass (HPF) 12dB/oct variable from 40Hz to 5000Hz
- Low pass (LPF) 24dB/oct variable 40Hz ~ 5000Hz
- Bandpass (BPF) 12dB-24dB/oct variable 40Hz ~ 5000Hz
- Signal/noise ratio (1 Watt) : > 98dB
- THD+Noise (Distortion) (1 Watt) : ≤ 0,05%
- Frequency response (±1dB) : 10Hz-90000Hz
- Input sensitivity RCA : 200mV 6V
- EBC remote (External Bass Control) included
- Dimensions : 525mm x 204mm x 59mm





Dual power transformer
(To improve the cooling and the reliability)

Aluminum heat-sink
(Strong, design, durable...
the best quality)

90% efficient Class-D technology
(Less heat, more power...)

TX
High Efficiency Class-D Amps



10mm² output connector
(For multiple coils wiring)

MTX CNC tooled logo
(Better was impossible)

21mm² power connectors
(We are serious about current)

TX81000D

- Mono block Class-D amplifier
- Output power (CEA2006 certified)
 - 1x 1000W RMS @ 2Ω, THD+N ≤1%
 - 1x 2000W RMS in bridge mode (2 amps)
 - 1x 600W RMS @ 4Ω et THD+N ≤1%
- Active x-over
- Low pass (LPF) 24dB/Oct variable from 40 to 150Hz
- Subsonic filter 24dB/Oct @ 30Hz
- Signal/noise ratio (1 watt) : >80dB
- THD+Noise (Distorsion) (1 watt) : ≤1%
- Frequency response (±1dB) : 20Hz-150Hz
- Sensitivity (RCA) : 200mV ~ 6V
- Dimensions : 125mm x 365mm x 50mm
- EBC remote control included (External Bass Control)
- Thermo regulated fan connector (for an external fan)
- Balanced inputs



Gain control
High level input

Subsonic filter switch
(For a perfect vented load
subwoofer control)

Variable low-pass x-over
(For a perfect setting)

Aluminum end-caps
(Strong, design, durable...)



EBC remote control
(to fine tune the subwoofer level
from the front seat)

EBC port
(For the remote control)

**Thermo regulated connector
for external cooling fan(s)**

RCA input

Master slave switch
(For bridge mode)

Data link port
(For bridge mode)



TX

High Efficiency Class-D Amps



TX6500D



TX480D

TX6500D

- Mono block Class-D amplifier
- Output power (CEA2006 certified)
 - 1x 500W RMS @ 2Ω, THD+N ≤1%
 - 1x 1000W RMS in bridge mode (2 amps)
 - 1x 300W RMS @ 4Ω et THD+N ≤1%
- Active x-over
- Low pass (LPF) 24dB/Oct variable from 40 to 150Hz
- Subsonic 24dB/Oct @ 30Hz
- Signal/noise ratio (1 watt) : >80dB
- THD+Noise (Distorsion) (1 watt) : ≤1%
- Réponse en fréquence (±1dB) : 20Hz-150Hz
- Sensitivity (RCA) : 200mV ~ 6V
- Dimensions : 125mm x 265mm x 50mm
- EBC remote control included (External Bass Control)



TX480D

- 4 channel wide range Class-D amplifier
- CEA2006 certified power
 - 4x 80 watts RMS @ 4Ω et THD+N ≤1%
 - 4x 120 watts RMS @ 2Ω et THD+N ≤1%
 - 2x 240 watts RMS bridged @ 4Ω et THD+N ≤1%
- Active x-over
- High-pass (HPF) 12dB/Oct variable from 40Hz to 400Hz
- Low-pass (LPF) 12dB/Oct variable from 40Hz to 400Hz
- Signal/Noise ratio (1 watt) : >80dB
- THD+Noise (Distortion) (1 watt) : ≤1%
- Frequency response (±1dB) : 5Hz-30000Hz
- Input sensitivity RCA : 200mV to 6V
- Dimensions : 125mm x 215mm x 50mm
- High and low level inputs



RT

When Room and Easy to Fit are Crucial



RT50.4M Specifications

- Class-AB 4 channel power amplifier micro size
- CEA2006 certified output power :
- 4x 40W RMS @2Ω THD+N ≤1%
- Signal/Noise ratio (1 watt) : >80dB
- THD+Noise (Distortion) (1 watt) : ≤1%
- Frequency response (±1dB) : 10Hz-50000Hz
- Sensitivity RCA : 100mV to 6V
- Dimensions : 260x120x52mm
- High level inputs on ISO connectors
- RCA input
- Output on ISO connector
- Automatic remote control



TR

The best quality price ratio amplifiers...



EBC-1 (optional)



EBC-1 (optional)

TR450 Specifications

- 4-Channel Class-AB wide range amplifier
- CEA2006 certified Power Output :
- 4x75W RMS @2Ω and THD+N ≤1%
- 4x50W RMS @4Ω and THD+N ≤1%
- 2x150W RMS bridged @4Ω and THD+N ≤1%
- Crossover :
- High pass 12dB/oct 80Hz - Low pass 12dB/oct 80Hz
- Signal-to-Noise Ratio (1 Watt) : > 73dB
- THD+Noise (Distortion) (1 Watt) : ≤ 0,2%
- Frequency Response (±1dB) : 10Hz-60000Hz
- Sensitivity : 200mV~6V
- Dimensions : 182x134x51mm
- High level inputs
- Optional EBC remote control (EBC-1)



- Wide range Class-AB amp for speakers and subwoofer
- Bridge mode for a subwoofer or an enclosure
- Optimized for 2Ω loads in stereo and 4Ω loads in bridge mono
- 12dB/Oct high-pass or low-pass x-over for speakers or subwoofer
- Full aluminum construction
- Optimized for RTE12AS, RTE12AV, RTF10AS, TR12AV, RT10AS, RT12AV
- Optional EBC remote control sold separately

TR275 Specifications

- 2-Channel Class-AB wide range amplifier
- CEA2006 certified Power Output :
- 2x110W RMS @2Ω and THD+N ≤1%
- 2x75W RMS @4Ω and THD+N ≤1%
- 1x220W RMS bridged @4Ω and THD+N ≤1%
- Crossover :
- High pass 12dB/oct 80Hz - Low pass 12dB/oct 80Hz
- Signal-to-Noise Ratio (1 Watt) : > 74dB
- THD+Noise (Distortion) (1 Watt) : ≤ 0,18%
- Frequency Response (±1dB) : 10Hz-60000Hz
- Sensitivity : 200mV~6V
- Dimensions : 142x134x51mm
- High level inputs
- Optional EBC remote control (EBC-1)



RFL

Breaking The Limits Superwoofers



RFL15 Specifications

- Superwoofer Ø38cm (15")
- Peak power : 10500W
- RMS power : 3500W
- Sensitivity : 92dB/2,83v/1m
- Impedance : 2Ω (SVC)
- Voice coil diameter : 4"
- BL factor : 26
- Frequency response : 26Hz - 500Hz

RFL15 Parameters

- Fs : 32 Hz
- Re : 2 Ω
- Z : 2Ω
- Qms : 5,81
- Qes : 0,44
- Qts : 0,41
- Vas : 59,7 liters
- Prms : 3500 Watts
- Mms : 383,8 grams
- Cms : 0,06mm/N
- BL : 26 N/A
- SPL 2,83V/1m : 92,3dB

Features

- Ultimate Performance Superwoofer
- BBR : 105 volts (a kind of record !)
- Heavy reinforced aluminum frame
 - Dual spider
 - High temperature 4" voice coil
- Flat copper coated aluminum VC wire
 - Dual voice coil cooling system
 - 35mm thick front plate
 - "Unlimited" power handling
- Aluminum made MTX front logo and back plate
 - Shipped in wooden crate
- Optimized to play loud with one MTX RFL4001D

RFL12 Specifications

- Superwoofer Ø30cm (12")
- Peak power : 9000W
- RMS power : 3000W
- Sensitivity : 90dB/2,83v/1m
- Impedance : 2Ω (SVC)
- Voice coil diameter : 4"
- BL factor BL : 25
- Frequency response : 26Hz - 500Hz

RFL12 Parameters

- Fs : 35 Hz
- Re : 2 Ω
- Z : 2Ω
- Qms : 5,33
- Qes : 0,40
- Qts : 0,37
- Vas : 42,7 liters
- Prms : 3000 Watts
- Mms : 326,9 grams
- Cms : 0,05mm/N
- BL : 25 N/A
- SPL 2,83V/1m : 90dB

TX8

Play Loud, for a long time...



TX815 Specifications

- Superwoofer Ø38cm (15")
- Peak power : 6000W
- RMS power : 2000W
- Sensitivity : 91dB/2,83v/1m
- Impedance : 2Ω (SVC)
- Voice coil diameter : 3"
- BL factor: 19
- Frequency response : 26Hz - 500Hz

TX815 Parameters

- Fs : 31 Hz
- Re : 2 Ω
- Z : 2 Ω
- Qms : 6,30
- Qes : 0,53
- Qts : 0,49
- Vas : 69,3 liters
- Prms : 2000 Watts
- Mms : 367 grams
- Cms : 0,07mm/N
- BL : 19 N/A
- SPL 2,83V/1m : 91,3dB

Features

- Very high Performance Superwoofer
 - BBR : 85 volts
- RFL heavy reinforced aluminum frame
 - Dual spider
 - High temperature 3" voice coil
 - Dual voice coil cooling system
 - 25mm thick front plate
 - Crazy high power handling
- Aluminum made MTX front logo and back plate
 - Optimized to play loud with one MTX TX81000D amp



TX812 Specifications

- Superwoofer Ø30cm (12")
- Peak power: 5400W
- RMS power : 1800W
- Sensitivity : 90dB/2,83v/1m
- Impedance : 2Ω (SVC)
- Voice coil diameter : 3"
- BL factor: 18
- Frequency response : 26Hz - 500Hz

TX812 Parameters

- Fs : 32 Hz
- Re : 2 Ω
- Z : 2 Ω
- Qms : 6,63
- Qes : 0,47
- Qts : 0,44
- Vas : 30,4 liters
- Prms : 1800 Watts
- Mms : 311grams
- Cms : 0,08mm/N
- BL : 18 N/A
- SPL 2,83V/1m : 90,0dB

TX6

Unmatched Quality Subwoofers



TX615 Specifications

- Superwoofer Ø38cm (15")
- Peak power: 3000W
- RMS power : 1000W
- Sensitivity : 94,8dB/2,83v/1m
- Impedance : 2Ω (SVC)
- Voice coil diameter : 2,5"
- BL factor: 17
- Frequency response : 20Hz - 500Hz

TX615 Parameters

- Fs : 28Hz
- Re : 2Ω
- Z : 2Ω
- Qms : 5,54
- Qes : 0,46
- Qts : 0,43
- Vas : 89,8 liters
- Prms : 1000 Watts
- Mms : 332,4 grams
- Cms : 0,090 mm/N
- BL : 17 N/A
- Sd : 838,2 cm²
- Vd : 1,173 liter
- Xmax : 14 mm
- SPL 2,83V/1m : 94,8 dB

Features

- High Performance Subwoofer
- MTX Aluminum frame
- 2,5" high temperature voice coil
- Dual voice coil cooling system
- Extra large suspension
- BBR : 48V
- Impressive quality price ratio
- Optimized to play loud with one MTX TX6500D



TX612 Specifications

- Superwoofer Ø30cm (12")
- Peak power: 2400W
- RMS power : 800W
- Sensitivity : 91,3dB/2,83v/1m
- Impedance : 2Ω (SVC)
- Voice coil diameter : 2,5"
- BL factor: 16
- Frequency response : 20Hz - 500Hz

TX612 Parameters

- Fs : 27 Hz
- Re : 2 Ω
- Z : 2 Ω
- Qms : 6,17
- Qes : 0,42
- Qts : 0,39
- Vas : 42,7 liters
- Prms : 800 Watts
- Mms : 279,1grams
- Cms : 0,120mm/N
- BL : 16 N/A
- Sd : 500,5cm²
- Xmax : 14mm
- Vd : 0,701 liter
- SPL 2,83V/1m : 91,3dB

S65

Ready to square off...

S6510-44 Specifications

- Square Subwoofer Ø25cm (10")
- Peak power: 1500W
- RMS power : 500W
- Sensitivity : 90,9dB/2,83V/1m
- Impedance : Dual 4Ω (DVC)
- Voice coil diameter : 2" (5,08cm)
- BL factor: 10,0
- Frequency response : 20Hz - 500Hz

S6512-44 Specifications

- Square Subwoofer Ø30cm (12")
- Peak power: 1500W
- RMS power : 500W
- Sensitivity : 93,2dB/2,83V/1m
- Impedance : Dual 4Ω (DVC)
- Voice coil diameter : 2" (5,08cm)
- BL factor: 10,3
- Frequency response : 20Hz - 500Hz

FPR

Flat is right...

FPR10-04 Specifications

- Shallow Mount Subwoofer Ø25cm (10")
- Peak power: 600W
- RMS power : 300W
- Sensitivity : 85,6dB/2,83V/1m
- Impedance : 4Ω (SVC)
- Voice coil diameter : 1.75" (4,45cm)
- BL factor: 13,08
- Frequency response : 28Hz - 150Hz

FPR12-04 Specifications

- Shallow Mount Subwoofer Ø30cm (12")
- Peak power: 600W
- RMS power : 300W
- Sensitivity : 86,8dB/2,83V/1m
- Impedance : 4Ω (SVC)
- Voice coil diameter : 1.75" (4,45cm)
- BL factor: 13,35
- Frequency response : 22Hz - 150Hz



S6512-44



S6510-44

Features :

SPV Technology - Original MTX steel frame
84mm! Depth only - Bubble shape cone with Alumium dust cap
Butyl rubber surround - Ø44mm high temp (220°) aluminium voice coil
High-end, heavy duty terminals designed by Streetwires
Designed for small sealed enclosures from 15 Liters and up



FPR10-04



FPR12-04

RT

RT Extraordinary Quality/Price Subwoofers

	RT10-04	RT12-04	RT15-04
Diameter	25cm (10")	30cm (12")	38cm (15")
Impedance	4Ω	4Ω	4Ω
Peak Power	750W	750W	900W
RMS Power	250W	250W	300W
Sensitivity	89,5dB	92,0dB	93,8dB
Xmax	16mm	16mm	18mm
Fs	32Hz	28Hz	18Hz
Vas	32l	68l	218l
Mounting Depth	12,4cm	13,5cm	16,3cm



RT10-04



RT12-04



RT15-04

Features RT subwoofers

- Features RT subs
- ALDS Technology
- SPV Technology
- 50mm voice coil
- Interlaced tinsel leads
- Oversized spider
- Butyl Xtra large suspension
- Rubber gasket
- Injected PP cone
- Cone in 1 piece
- Sealed compatible
- Vented compatible
- MTX basket
- X-max (1 way): 16mm

TR

The best quality price ratio amplifiers...

	RT12-04
Diameter	30cm (12")
Impedance	4Ω
Peak Power	600W
RMS Power	200W
Sensitivity	90,5dB
Xmax	16mm
Fs	32Hz
Vas	73l
Mounting Depth	13,7cm

Features TR subwoofer
 PP injected electroplated cone
 38mm Aluminum voice coil
 Rubber suspension
 Rubber gasket



TR12-04

TX8

You want the best, you got the best...

Features

38mm Til voice coil - 100mm giant magnet - Original aluminum basket - Aluminum phase plug - Dual color fiberglass cone - Butyl rubber suspension - Chrome back plate - 28mm silk dome tweeter - X-over : Air coils + Poly caps + 3 tweeter levels - Sound quality & Power handling



	Ø	Type	Ω	Peak Power	RMS Power	Sensitivity 2V 1m	Response	Tweeter	Mounting Depth	Grills
T8502	13cm	Compo 2 way	4Ω	480W	120W	89,6dB	56-25000Hz	25mm	64mm	✓
TX8652	16,5cm	Compo 2 way	4Ω	480W	120W	90,8dB	42-32000Hz	28mm	66mm	✓

TX6

BMW and Mini Custom Fit Speakers

BMW is famous for its extraordinary cars, its built quality, its performance engines, its reliability... But when it comes to the audio system... there is a problem. Good news, we have the solution to turn the sound of a 50 years old radio into a state of the art high end home hifi sound. Upgrading the original sound system is super fast and easy due to our original frames. No need to cut or drill, everything stays original... Except the speakers of course!



Specifications

- BMW and Mini spk with original frames
- 2 neodymium 8" subwoofers
- 2 neodymium 4" mids
- 2 neodymium 1" silk dome tweeters
- Peak power : 450W
- RMS power : 150W
- Impedance : 4Ω
- Response : 23-25000Hz
- Efficiency : 94,5dB/2,83v/1m
- In-line passive x-overs
- Compatibility :
BMW : e60 e61 e70 e71 e81 e82 e83 e84 e87 e88 e90 e91 e92 e93 f10 f11 f12 f13 f20 f21 f25 f30 f31 f35
Mini : r55 r56 r57 r58 r59 r60 r61

Features

- Easy installation without any modification or drilling.
- Upgrades the original sound, even with the original head-unit.
 - Higher upgrade with the use of a MTX RT30.4M or RT50.4M amp.
- Luxury speakers with neodymium magnets and fiber cones.
- All cables and screws are included. With original BMW connectors.

T6000

The Legendary Speakers



Features T6000 speakers

Up to 30mm Til Voice coils - Up to 115mm magnets
Bicolor fiberglass cones - Aluminum phase plug
Rubber magnet cover - Butyl rubber suspension
19mm / 25mm silk dome tweeters
High quality x-over (air coils, poly caps)
Power handling - Sound quality

	Ø	Type	Ω	Peak Power	RMS Power	Sensitivity	Response	Voice Coil	Mounting Depth	Grills
T6C402	10cm	Coax 2 way	4Ω	180W	45W	90,5dB	63-25000Hz	Kapton 25mm	49,3mm	✓
T6C502	13cm	Coax 2 way	4Ω	220W	55W	91,5dB	51-25000Hz	Kapton 25mm	58,5mm	✓
T6C653	16,5cm	Coax 3 way	4Ω	260W	65W	92,0dB	48-25000Hz	Kapton 25mm	69,0mm	✓
T6C693	15x23cm	Coax 3 way	4Ω	480W	120W	94,0dB	27-25000Hz	Til 30mm + 2x19mm	88,50mm	✓
T6S502	13cm	Compo 2 way	4Ω	340W	85W	92,0dB	52-25000Hz	Til 30mm	58,5mm	✓
T6S652	16,5cm	Compo 2 way	4Ω	400W	100W	93,0dB	44-25000Hz	Til 30mm	69,0mm	✓
T6S25T	25mm	Tweeter	4Ω	400W	100W	93,0dB	2000-25000Hz	Aluminum 25mm	13,8mm	✓

TX2

The best quality price ratio speakers...



Features TX2 speakers

- 25mm Kapton voice coil
- Up to 100mm strontium woofer magnets
- Electroplated injected PP cone
- Cone with laser printed MTX logos and specs
- Butyl rubber suspension
- 25mm silk dome tweeter (Compo)
- Laser cut logos on the cones

	Ø	Type	Ω	Peak Power	RMS Power	Sensitivity	Response	Voice Coil	Mounting Depth	Grills
TX240C	10cm	Coax 2 way	4Ω	180W	45W	90,5dB	65-22000Hz	Kapton 25mm	43mm	✓
TX250C	13cm	Coax 2 way	4Ω	220W	55W	91,5dB	60-22000Hz	Kapton 25mm	49mm	✓
TX265C	16,5cm	Coax 2 way	4Ω	260W	65W	92,5dB	48-22000Hz	Kapton 25mm	62mm	✓
TX269C	15x23cm	Coax 3 way	4Ω	320W	80W	93,5dB	24-22000Hz	Kapton 25mm	80mm	✓
TX250S	13cm	Compo 2 way	4Ω	220W	55W	91,5dB	60-25000Hz	Kapton 25mm	52mm	✓
TX260S	16,5cm	Compo 2 way	4Ω	260W	65W	92,5dB	48-25000Hz	Kapton 25mm	63mm	✓

TR

The best quality price ratio speakers...



Features TR speakers

- 25mm Kapton voice coil
- Up to 100mm strontium woofer magnets
- Electroplated injected PP cone
- Cone with laser printed MTX logos and specs
- Butyl rubber suspension
- 25mm silk dome tweeter (Compo)
- Laser cut logos on the cones

	Ø	Type	Ω	Peak Power	RMS Power	Sensitivity	Response	Voice Coil	Mounting Depth	Grills
TR40C	10cm	Coax 2 way	4Ω	180W	45W	90,5dB	65-22000Hz	Kapton 25mm	43mm	✓
TR50C	13cm	Coax 2 way	4Ω	220W	55W	91,5dB	60-22000Hz	Kapton 25mm	49mm	✓
TR65C	16,5cm	Coax 2 way	4Ω	260W	65W	92,5dB	48-22000Hz	Kapton 25mm	62mm	✓
TR69C	15x23cm	Coax 3 way	4Ω	320W	80W	93,5dB	24-22000Hz	Kapton 25mm	80mm	✓
TR50S	13cm	Compo 2 way	4Ω	220W	55W	91,5dB	60-25000Hz	Kapton 25mm	52mm	✓
TR65S	16,5cm	Compo 2 way	4Ω	260W	65W	92,5dB	48-25000Hz	Kapton 25mm	63mm	✓

RTX

High Efficiency Very "Loud" Speakers

The MTX RoadTHUNDER Extreme full range speakers are designed to provide maximum levels of SPL for enthusiasts that want their systems to be heard by their friends a couple of blocks over. These high efficiency drivers are constructed using the highest quality materials to ensure that they continue to deliver an unbeatable performance day after day. Available in 4 sizes of mid bass drivers and 2 sizes of bullet tweeters, the RTX speakers can be used in an infinite number of installations. When used in conjunction with MTX subwoofers, these speakers can make any vehicle a concert on wheels.



	Speaker Ø	Type	Ω	Peak Power	RMS Power	Sensitivity	Response	Mounting Depth
RTX2BT	2" Tweeter	Bulet Tweeter	8Ω	200W	100W	94,0dB	3500-23700Hz	54mm
RTX4BT	4" Tweeter	Bulet Tweeter	8Ω	400W	200W	97,0dB	2700-22300Hz	53mm
RTX658	16,5cm	Midbass	8Ω	200W	100W	94,0dB	136-6500Hz	67mm
RTX88	20cm 8"	Midbass	8Ω	300W	150W	94,0dB	82-6000Hz	75mm
RTX108	25cm 10"	Midbass	8Ω	500W	250W	94,0dB	70-4600Hz	102mm
RTX128	30cm 12"	Midbass	8Ω	600W	300W	96,0dB	66-5200Hz	117mm



Innovative Powered Enclosures

Features

- Class-D amp for more bass with less current draw.
- The best and most simple solution to add bass to your car-audio system.
- Strong 15mm to 18mm MDF construction.
- High performance subwoofers designed and developed exclusively for the RTP enclosures.
- The amp is integrated on the side for higher thermal dissipation and easy installation.
- EBC remote control included.

Specifications RTP8

- Powered Vented Enclosure
- Class-D power amp
- Subwoofer : 20cm (8")
- Voice coil : 38mm
- Peak power : 360W
- RMS power : 120W
- Low pass filter 18dB à 80Hz
- EBC remote included
- High level and low level inputs
- Dimensions : 333x308x313mm

Specifications RTP8x2

- Dual Sub Powered Vented Enclosure
- Class-D power amp
- Subwoofers : 2x20cm (dual 8")
- Voice coil : 38mm
- Peak power : 720W
- RMS power : 240W
- Low pass filter 18dB à 80Hz
- EBC remote included
- High level and low level inputs
- Dimensions : 310x580x320mm

Specifications RTP8x3

- Triple Sub Powered Vented Enclosure
- Class-D power amp
- Subwoofers : 3x20cm (triple 8")
- Voice coil : 38mm
- Peak power : 1080W
- RMS power : 360W
- Low pass filter 18dB à 80Hz
- EBC remote included
- High level and low level inputs
- Dimensions : 310x820x320mm



RTP8

RTP8x2

RTP8x3

RT

Innovative Powered Enclosures

Features

- Class-D amp for more bass with less current draw.
- The best and most simple solution to add bass to your car-audio system.
- Strong 18mm MDF construction.
- High performance subwoofers designed and developed exclusively for the RTP enclosures.
- The amp is integrated on the side for higher thermal dissipation and easy installation.
- EBC remote control included

Specifications RTP12

- Powered Vented Enclosure
- Class-D Amp
- 30cm (12") Subwoofer
- Voice coil : 38mm
- Peak Power : 0W
- RMS Power : 220W
- Low pass x-over 18dB @80Hz
- EBC remote control included
- High and low level input
- Dimensions : 430x460x430mm

Specifications RTP12x2

- Powered Vented Enclosure
- Class-D amp
- 30cm (12") subwoofer
- Voice coil : 38mm
- Peak Power : 1080W
- RMS Power : 360W
- Low pass x-over 18dB @80Hz
- EBC remote control included
- High and low level input
- Dimensions : 430x785x430mm



RTP12



RTP12x2



Powered Tubes & Powered Enclosures

Specifications TR8PT

- 8" Tube Powered Vented Enclosure
- RMS Power : 100W
- MAX Power : 300W
- Low pass x-over : variable from 50 to 200Hz
- Input Sensitivity : 6V - 100mV
- High and low level inputs
- Subwoofer : 20cm (8")
- Dimensions : 25x25x54cm
- EBC remote control included

Specifications TR12PT

- 12" Tube Powered Vented Enclosure
- RMS Power : 150W
- MAX Power : 450W
- Low pass x-over : variable from 50 to 200Hz
- Input Sensitivity : 6V - 100mV
- High and low level inputs
- Subwoofer : 30cm (12")
- Dimensions : 36,5x36,5x55cm
- EBC remote control included



- Features :
- MTX high output Bass solution
 - Powerful, accurate Bass
 - Easy to fit design
 - Build in Class-AB powerful amplifier
 - Deep and powerful sound
 - Belts and screws included
 - EBC remote included



Loaded Enclosures

Specifications RTE12AS :

- Small sealed enclosure
- 12" subwoofer
- RMS CEA Power : 350W
- Peak Power : 1050W
- Impedance : 4Ω
- Sensitivity : 92,5dB/2,83V/1m
- Frequency Response : 23-300Hz
- Weight : 13Kg
- Dimensions : 36,5x45x31,8cm

Specifications RTF10AS :

- Flat sealed enclosure
- 10" subwoofer
- RMS CEA Power : 300W
- Peak Power : 900W
- Impedance : 4Ω
- Sensitivity : 91dB/2,83V/1m
- Frequency Response : 29-300Hz
- Weight : 10Kg
- Dimensions : 34x48x13cm



RTE12AS

RTF10AS

- Features :
- 12" subwoofer in a very small easy to fit enclosure
 - Subwoofer optimised and built for this specific enclosure
 - 16mm MDF construction, rubber gasket, spring terminals...
 - Recommended amps : T250 T450 TR100.2 TR100.4 TR275 TR450
 - Very efficient and powerful bass

- Features :
- Super shallow, it fits anywhere
 - Subwoofer optimised and built for this specific enclosure
 - 16mm MDF construction, rubber gasket, spring terminals...
 - Recommended amps : T250 T450 TR100.2 TR100.4 TR275 TR450
 - Impossible to make more bass in such a small enclosure



Loaded Enclosures

Features RT12AT Tube enclosure

High output MTX Slotported Tube Enclosure
Vented enclosure with ROADTHUNDER subwoofer
Unique slot port design
Designed to deliver loud and accurate bass
Spider Plateau Venting (SPV)
Asymmetrical Linear Drive System (ALDS)
Spring loaded connection terminals for easy connection
Designed to be used with MTX 2- or 4-channel amplifier

Specifications RT12AT :

RMS Power : 200W
Max Power : 600W
Impedance : 4Ω
Frequency response : 20Hz - 150Hz
Sensitivity : 93,5dB/2,83V/1m
Woofer diameter : 30cm (12")
Xmax : 12,0mm
Dimensions : 36,5x36,5x55cm

Features RT12AV RT12x2DV RT10x3DS enclosures :

Award winning High output MTX boxes
19mm MDF construction
Vinyl finish with carpeted end caps and MTX stacked logos
Enclosures with high power RT subwoofers
Designed to deliver loud and accurate bass
Spider Plateau Venting (SPV)
Asymmetrical Linear Drive System (ALDS)
Spring loaded connection terminals for easy connection
Designed to be used with MTX 2- or 4-channel amplifiers

	RT12AV	RT12x2DV	RT10x3DS
Sub Ø	30cm (12")	2x30cm (2x12")	3x25cm (3x10")
Type	Vented encl.	Vented encl.	Sealed encl.
Impedance	4Ω	2Ω	2Ω
Peak Power	750W	1500W	1800W
RMS Power	250W	500W	600W
Sensitivity	90,0dB	94,3dB	95,0dB
Dimensions	41x54x44cm	41x89x44cm	31x89,5x33,5cm
Party Pack	RTP2000	RTP4000	RTP5000

RT12AT



RT12AV



RT12x2DV



RT10x3DS



Passive and Powered Enclosures

Features TR12AV

MTX high output vented enclosure
Turbulence free aero port vent
Deep, Loud and accurate Bass
Brushed and electroplated, injected polypropylene cone
Rubber suspension Great powerhandling and Bass

Specifications TR12AV

- RMS Power handling : 200W
- Peak Power handling : 600W
- Impedance : 4Ω
- Frequency response : 32Hz - 200Hz
- Sensitivity : 90,5dB/2,83V/1m
- Woofer diameter : 30cm (12")
- Xmax : 16,0mm
- Dimensions : 46,5x36,5x38,5cm

Features TR8PT

MTX high output bass solution
Powerful, accurate bass
Easy to fit design
Brushed electroplated cone
Injected Polypropylene cone
Built-in 100W RMS amplifier
Deep and powerful sound
Belts and screws included

Specifications TR8PT

- Powered Vented Tube Enclosure
- RMS Power : 100W
- MAX Power : 300W
- Low pass x-over : variable from 50 to 200Hz
- Input Sensitivity : 6V - 100mV
- Subwoofer : 20cm (8")
- Dimensions : 25x25x54cm

Features TRP8

Class-D amp for more bass with less current draw.
The best and most simple solution to add bass to your car-audio system.
Strong 15mm MDF construction.
High performance subwoofers designed and developed exclusively for the the TRP8 enclosure.
The amp is integrated on the side for higher thermal dissipation and easy installation.
EBC remote control included

Specifications TRP8

- Powered Vented Enclosure
- Class-D power amp
- Subwoofer : 20cm (8")
- Voice coil : 38mm
- Peak power : 360W
- RMS power : 120W
- Low pass filter 18dB à 80Hz
- EBC remote included
- High level and low level inputs
- Dimensions : 333x308x133mm



TR8PT



TR12AV



TRP8

RT

Power Packs



RTP2000
RT602 (2ch-amp 180W RMS CEA @2Ω)
+ RT12AV (30cm subwoofer vented enclosure 250W RMS 4Ω)



RTP4000
RT501 (Mono block amp 500W RMS CEA @2Ω)
+ RT12x2DV (Dual 30cm vented enclosure 500W RMS 2Ω)



RTP5000
RT500.1D (Class-D Mono block amp 500W RMS CEA @2Ω)
+ RT10x3DS (triple 25cm sealed enclosure 600W RMS 2Ω)

SLEDGE HAMMER



Features Unloaded SledgeHammer

- 19mm MDF strong construction
- Black mat vinyl baffle finish
- Available to fit round subwoofer
- 8 or 16 HEX woofer screws included
- Slot port
- Progressive port technology
- Fits any MTX round subwoofer
- MTX stiched logo

	Ø	Shape	Dimensions
SLH10U	25cm (10")	Round	37x51x46cm
SLH12U	30cm (12")	Round	41x59x49cm
SLH15U	38cm (15")	Round	45x64x50cm
SLH12x2U	2x30cm (2x12")	Round	41x91x50cm
SLH15x2U	2x38cm (2x15")	Round	53x105x50cm

ZNX6K : 6mm²



ZNX

Power Kits

ZNX6K
ZeroNoise 6mm² (10AWG) 5m+0,7m
CCA UltraFlow power kit with 5m
HyperTwist RCA, ATO fuse holder, 2x
ATO fuses, 5m remote cable, spade
connectors and 6x tie raps

ZNX10K : 10mm²



ZNX10K
ZeroNoise 10mm² (7AWG) 5m+0,7m
CCA UltraFlow power kit with 5m
HyperTwist RCA, AFS fuse holder, 2x
AFS fuses, 5m remote cable, spade
connectors and 6x tie raps

ZNX21K
ZeroNoise 21mm² (4AWG) 5m+0,7m
CCA UltraFlow power kit with 5m
HyperTwist RCA, AFS fuse holder, 2x
AFS fuses, 5m remote cable, spade
connectors and 6x tie raps



ZNX21K : 21mm²



ZNX35K : 35mm²



ZNX35K
ZeroNoise 35mm² (2AWG) 5m+0,7m
CCA UltraFlow power kit with ANL fuse
holder, 2x ANL fuses, 5m remote cable,
spade connectors

ZNX50K
ZeroNoise 50mm² (0AWG) 5m+0,7m
CCA UltraFlow power kit with ANL fuse
holder, 2x ANL fuses, 5m remote cable,
spade connectors



ZNX50K : 50mm²



ZNHD

ZNHD top of the art audio cables

ZNHD5.2

ZeroNoise High Definition 5m symmetric HyperTwist
100% copper audio cable with quadruple shield.

ZNHD3.2

ZeroNoise HighDefinition 3m symmetric HyperTwist
100% copper audio cable with quadruple shield.

ZNHD1.2

ZeroNoise HighDefinition 1m symmetric HyperTwist
100% copper audio cable with quadruple shield.



ZNX

ZNX audio cables



ZNK5.2
ZeroNoise 5m HyperTwist 100%
copper audio cable.

ZNK3.2
ZeroNoise 3m HyperTwist 100%
copper audio cable.

ZNK1.2
ZeroNoise 1m HyperTwist 100%
copper audio cable.

ZNXY1M
ZeroNoise 50cm HyperTwist 100%
copper Y-cable 1 male 2 female.

ZNXY1F
ZeroNoise 50cm HyperTwist 100%
copper Y-cable 1 female 2 male.

ZNX

ZNX audio video cables



ZNK5.3
ZeroNoise 5m HyperTwist 100%
copper audio video cable.

ZNK3.3
ZeroNoise 3m HyperTwist 100%
copper audio video cable.

ZNK1.3
ZeroNoise 1m HyperTwist 100%
copper audio video cable.

ZNX

ZNX video cables




ZNK5.1 :
ZeroNoise 5m HyperTwist 100%
copper video cable.

ZNK3.1 :
ZeroNoise 3m HyperTwist 100%
copper video cable.

ZNK1.3 :
ZeroNoise 1m HyperTwist 100%
copper video cable.

Power Cap

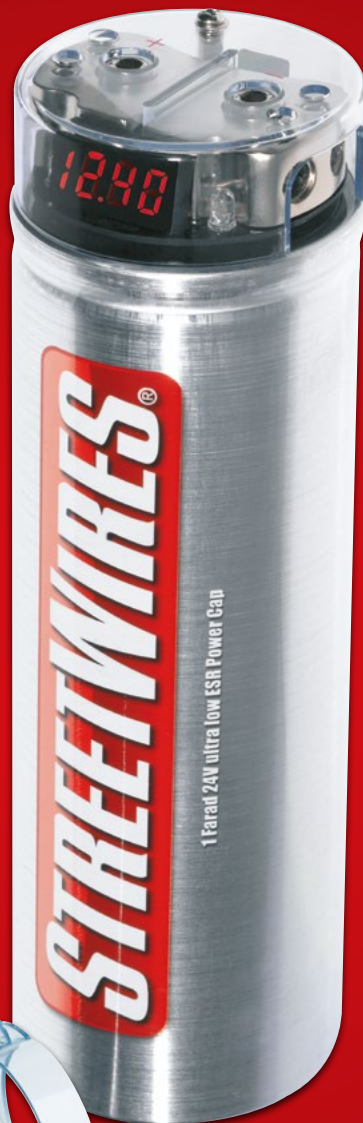

ZNXCAP1F

1 Farad 24V High Quality Ultra Low ESR Power Cap with distribution block (4x21mm2) and Digital Voltmeter

Distribution Blocks

ZNXDB4
Distribution block with 4 inputs/outputs: 1x35mm2 + 1x21mm2 + 2x10mm2 (1x2AWG + 1x4AWG + 2x7AWG)



ZNXDB6
Distribution block with 6 inputs/outputs: 1x50mm2 + 1x35mm2 + 2x21mm2 + 2x10mm2 (1x0AWG + 2x2AWG + 2x4AWG + 2x7AWG)



Speaker Cables



ZNX1.5SC
15m ZeroNoise 1,5mm2 (15AWG) 100% Copper SuperCable® Speaker Wire in blister.

ZNX3.0SC
15m ZeroNoise 3,0mm2 (9AWG) 100% Copper SuperCable® Speaker Wire in blister.

ZNX

Accessories

Fuses

ZNXFH21
10-21mm2 (7-4AWG) AFS
Waterproof Fuse Holder with 2 fuses included


ZNXF40 : 5 AFS 40A fuses
ZNXF60 : 5 AFS 60A fuses
ZNXF80 : 5 AFS 80A fuses



ZNX1.5SCR
100m ZeroNoise 1,5mm2 (15AWG) 100% Copper SuperCable® Speaker Wire on roll



MTX is proud to be an American Audio Company
since 1971.

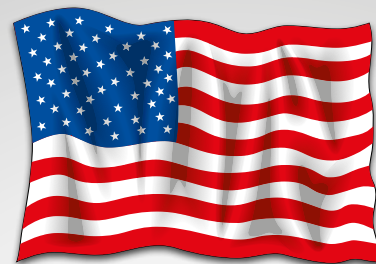

MTX is a proud member of Mitek Corp high
quality consumer audio product lines.



mtxaudio.eu



twitter.com/MTXEurope



facebook.com/MTXEurope