



RTX654


16,5cm (6.5") 4Ω 125W RMS High Efficiency Midrange



Parameters

- Re : 3,04Ω
- Le : 0,205mH
- L2 : 0,238mH
- R2 : 2,03Ω
- Cmes : 315,77μF
- Res : 54,31Ω
- Fs : 145,3Hz
- Mms : 11,501g
- Mmd : 9,773g
- Rms : 0,671 Kg/s
- Cms : 0,104mm/N
- Kms : 9,58N/mm
- Bl : 6,035N/A
- Qms : 15,652
- Qes : 0,875
- Qts : 0,829
- Vas : 2,6027 liters
- Sd : 132,73cm²
- Lnom : 97,2/2,83V/1m

Dimensions

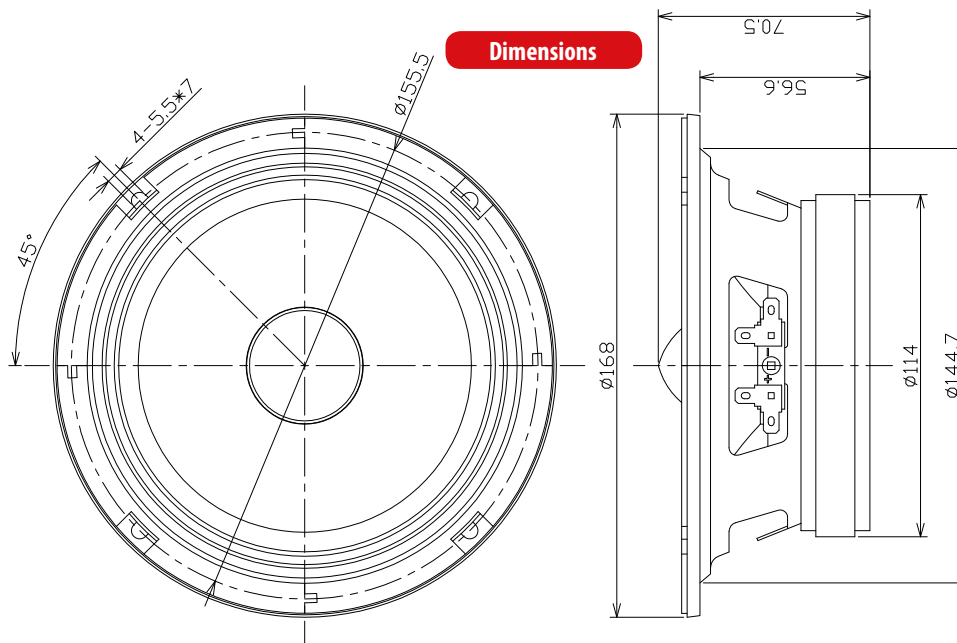

Exceptional sound quality with an incredible sense of music...

38mm giant voice coil for more power handling

115mm extra large strontium magnet for a better cone control and more power handling

Compressed paper cone for more efficiency, softness and high quality sound

Treated Cloth edge suspension for a better efficiency

Highly detailed midrange
Good bass response

Easy to install - Fits into the original 6.5" 16,5 cut outs (Ø145mm)

Sold by piece - You need two RTX654 for a stereo system

Design to work fine with MTX RTX2BTs or RTX4BTs tweeters

Design to work fine with MTX TX2275 TX2450 TX480D RFL4120 amps



Specifications

- High efficiency midrange
- Diameter : 16,5cm (6.5")
- Max Power : 500W
- RMS Power : 125W
- Sensitivity : 97,2dB/2,83v/1m
- Impedance : 4Ω
- Freq. response : 150Hz - 10000Hz
- Mounting Depth : 56,6mm
- Recommended x-over : >150Hz
- Fs : 145Hz

mtxaudio.eu

facebook.com/MTXEurope

twitter.com/MTXEurope